


model no. RS-M

Recessed Socket for 1/4 inch Mirror  
Spot on Lighting

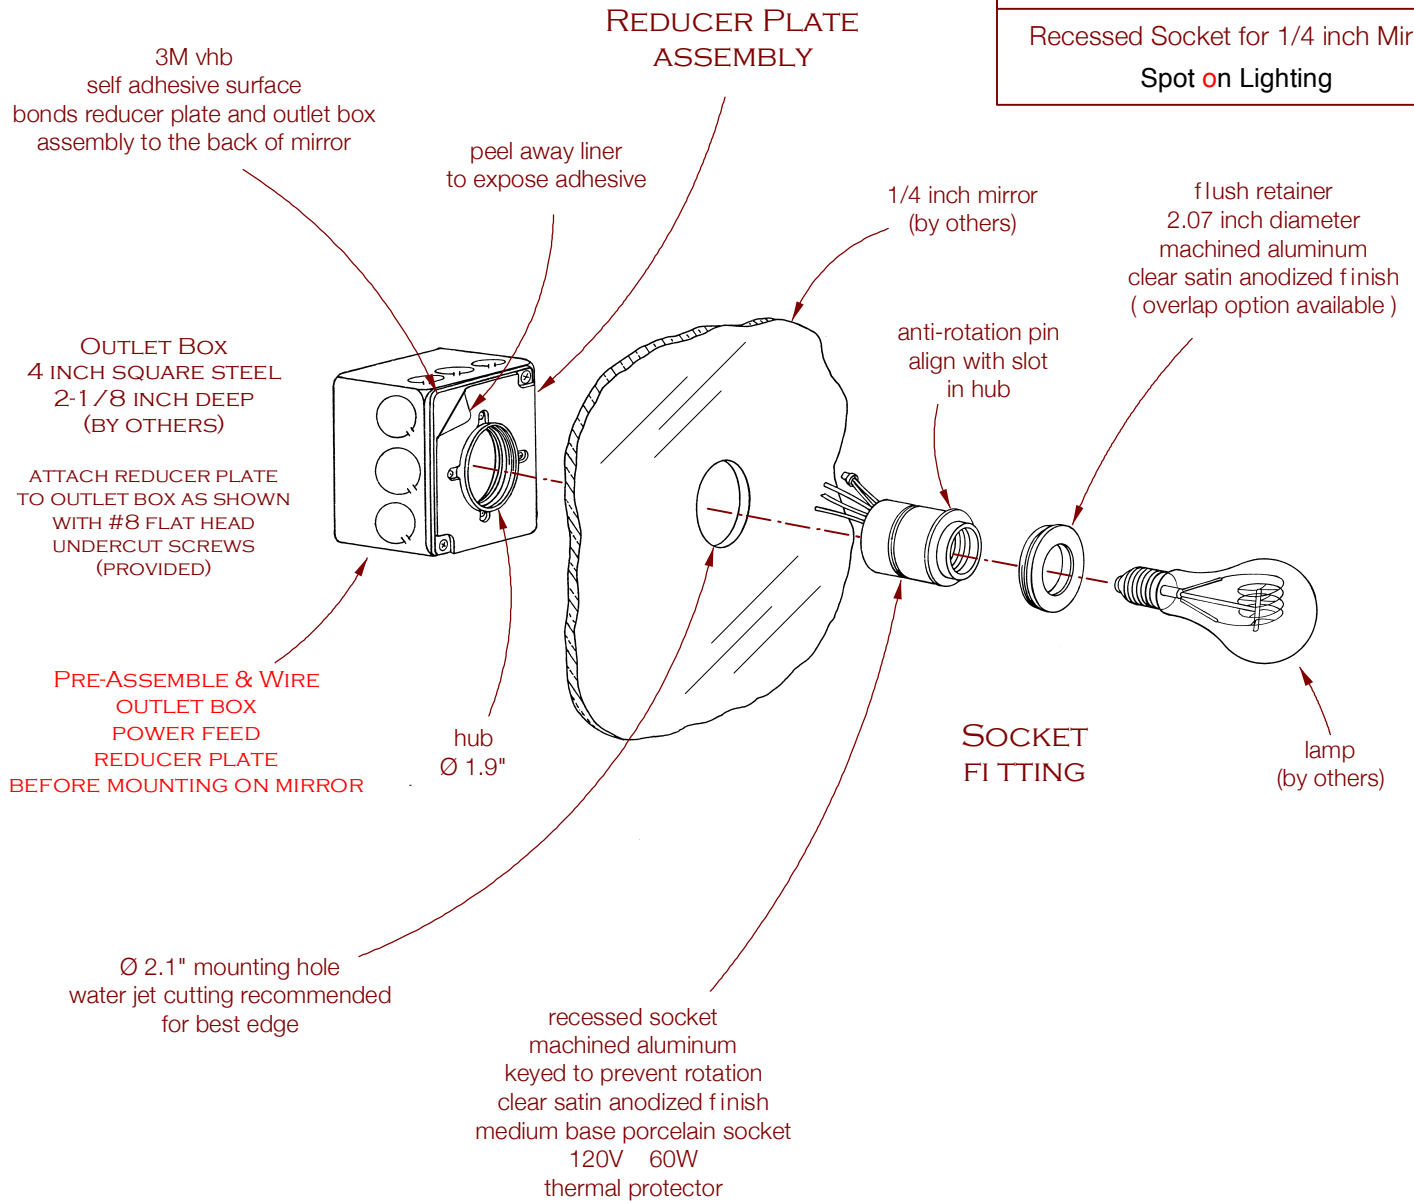

## INSTALLATION & COORDINATION

- The reducer plate is bonded to the back of 1/4 inch mirror with 3M vhb structural adhesive tape
  - no other support is needed -
- The mirror needs to be accessible from the rear during installation in order to mount the reducer plate on its back
  - if it is not accessible then the reducer plate can be premounted before the mirror is installed.
- plan wire routing and mirror support carefully so there is no interference between the wiring, the fixture and the building structure - both during and after the mirror installation.
- splices and connections to the branch circuit are accessible and can be inspected from the room.
- 2.2 inch diameter overlap trim available - model no. RS-M-OT

UL Listed  
Patent Pending

weight = 1-1/2 lbs